




REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO

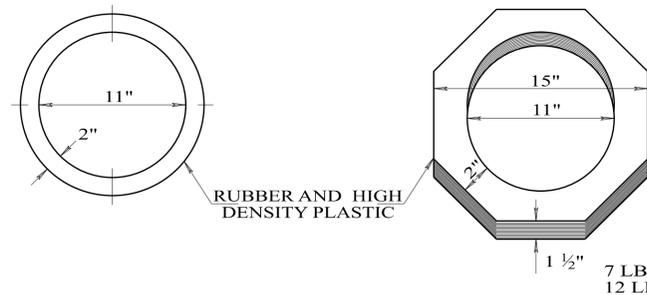

**BALLAST FOR CONE**  
BALLAST SHALL BE REQUIRED  
ALL DIMENSIONS ARE APPROXIMATE.

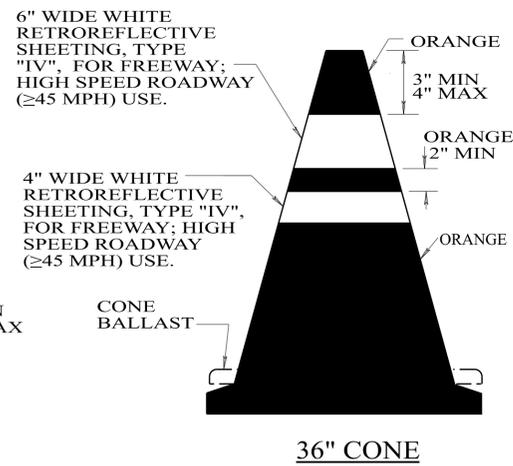


**NOTE:**  
BEGINNING JANUARY 1, 2027, ALL TRAFFIC CONTROL OPERATIONS, INCLUDING BUT NOT LIMITED TO UTILITY, MAINTENANCE, AND CONSTRUCTION ACTIVITIES, SHALL USE 36-INCH TRAFFIC CONES IN ACCORDANCE WITH APPLICABLE ALDOT STANDARD SPECIFICATIONS AND TEMPORARY TRAFFIC CONTROL DRAWINGS. THE USE OF 28" TRAFFIC CONES SHALL NOT BE PERMITTED ON OR AFTER JANUARY 1, 2027.

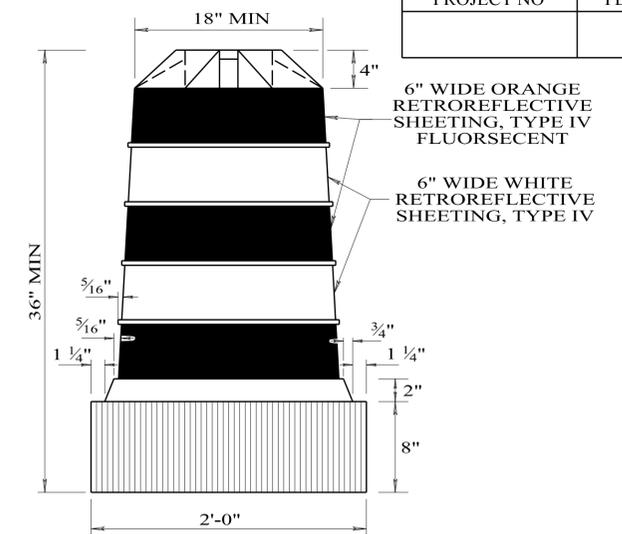

**TYPE "B"**  
**CHANNELIZING DRUM DESIGN**


CHANNELIZING DRUMS SHALL BE FLEXIBLE PLASTIC, SET ON END AND COLOR SHALL BE ORANGE AND WHITE RETROREFLECTIVE STRIPES AND SHOULD NEVER BE PLACED IN THE ROADWAY WITHOUT ADVANCED WARNING SIGNS. DRUMS SHOULD NOT BE WEIGHTED TO THE EXTENT THAT WOULD MAKE THEM HAZARDOUS TO MOTORISTS.

**RETROREFLECTIVE SHEETING DESIGN**  
RETROREFLECTIVE SHEETING USED ON CHANNELIZING DRUMS SHALL BE TYPE "IV", AS DESCRIBED IN THE ALABAMA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS, SECTION 880. ORANGE SHALL BE FLUORESCENT

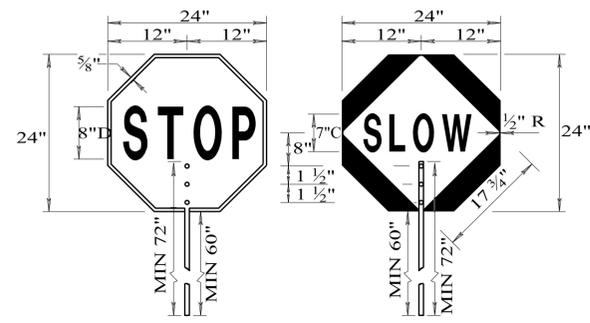

**STAFF MOUNTED PADDLES**


THE STAFF MOUNTED PADDLES SHALL BE FABRICATED USING TYPE "III" OR "IV" RETROREFLECTIVE SHEETING ON BOTH SIDES. THE STOP SIGN SHALL HAVE A RED BACKGROUND WITH WHITE LEGEND AND BORDER. THE SLOW SIGN SHALL HAVE AN ORANGE BACKGROUND WITH BLACK LEGEND AND BORDER.

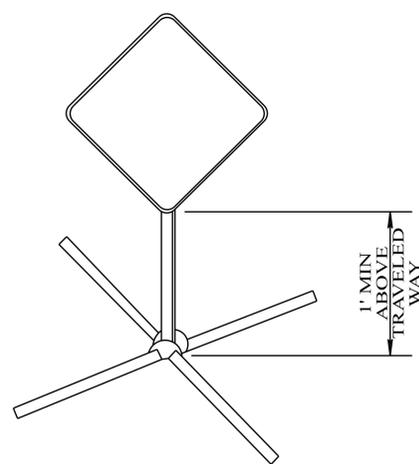

**TYPICAL SIGN INSTALLATION (TEMPORARY SUPPORTS)**

RIGID OR ROLL-UP SIGN MATERIAL ARE ALLOWED AS PER THE CURRENT ALABAMA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION SECTION 740.02.


REQD (TWO) 1/4" THICK x 2" WIDE METAL HANGERS MOUNTED FOR EACH SIDE OF TOP EDGE OF SIGN PANEL WITH THE USE OF 3/16" BOLTS COUNTER-SUNK INTO PLYWOOD.

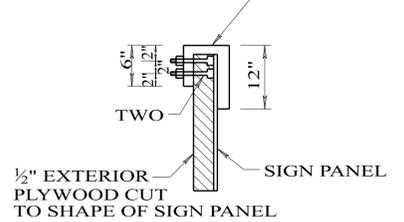

**INSTALLATION OF SIGN COVERING MATERIAL DURING NON-USE**

EXPOSED SURFACE MAY BE PAINTED. IF PAINTED, COLOR SHALL BE BLACK. ALTERNATE TYPES OF COVERING MATERIAL AND METHODS OF INSTALLATION MAY BE SUBMITTED BY THE CONTRACTOR FOR CONSIDERATION OF APPROVAL BY THE DEPARTMENT.


THE HAND SIGNALING FLAG SHALL BE MADE OF A RED OR FLUORESCENT ORANGE/RED SEMI-FLEXIBLE VINYL WITH HEAT SEALED WELT SECURELY FASTENED TO A STAFF OF APPROXIMATELY 36".

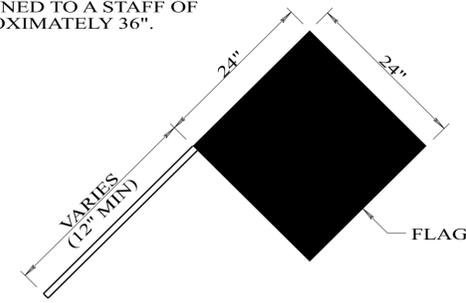


**HAND SIGNALING FLAG**

FLAGS SHOULD ONLY BE USED UNDER EMERGENCY CONDITIONS, OR AT A SPOT LOCATION WHICH CAN BEST BE CONTROLLED BY A SINGLE FLAGGER USING A FLAG.


6" WIDE ORANGE RETROREFLECTIVE SHEETING, TYPE "IV" FLUORESCENT"  
6" WIDE WHITE RETROREFLECTIVE SHEETING, TYPE "IV"  
DAYTIME OR NIGHTTIME USE

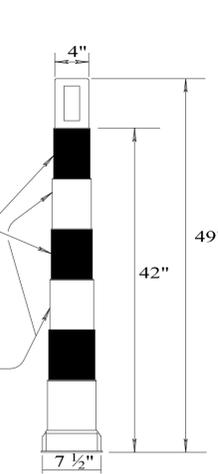

**42" CONE**



**BALLAST FOR CONE**  
BALLAST SHALL BE REQUIRED ALL DIMENSIONS ARE APPROXIMATE.



**RETROREFLECTIVE SHEETING DESIGN**  
RETROREFLECTIVE SHEETING USED ON CHANNELIZING CONES SHALL BE TYPE "IV", AS DESCRIBED IN THE ALABAMA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS, SECTION 880. ORANGE SHALL BE FLUORESCENT

NOT TO SCALE

--SPECIFICATIONS--  
CURRENT ALABAMA DEPARTMENT OF TRANSPORTATION